

Elsafe Sentinel II

Electronic Safes

ASSA ABLOY Global Solutions goes beyond the ordinary with the Elsafe Sentinel II in-room safe series. We have taken in-room security to a new level and combined it with a functional and trendy design, delivering the same unmatched security standards we are known for.

Sentinel II blends into any environment and is the perfect in-room safe for the quality and design conscious properties.



FEATURES

- : EPD (Environmental Product Declaration) certified*
- : UL-1037 Certified for physical strength and security
- : REACH, RoHS and Prop 65 compliant
- : Industry-leading audit trail (500 events)
- : Information stored in non volatile memory
- : Reprogrammable configurations
- : ADA (Americans with Disabilities Acts) compliant telephone style keypad
- : 4 digit guest code
- : LED display for clear visible numbers
- : Unique error and service codes on safe display
- : Green backlit keypad
- : Internal light
- : Remember PIN code for re-lock
- : Powered with five (5) AA batteries.
- : Low battery warning
- : Easy external battery change
- : Spring loaded door
- : Accommodates up to 17" laptop in certain models
- : Serviced by service tablet or laptop with an interface cable and unique service code
- : Anti tamper labyrinth
- : Internal carpet
- : Unique triangular locking bolt enforcement
- : Easy maintenance
- : Attractive ergonomic design

- : Revolutionary locking system with interlocking deadbolt mechanism
- : One piece cold pressed curved door (over 70% stronger than flat steel door)
- : Extended solid steel bolt hinges for maximum security and durability
- : Solid arc welded heavy gauge steel construction for superior strength and security

Optional features

- : Anti-tamper switch
- : Rental mode by activation code
- : Power outlet inside the safe
- : AC power supply (Batteries as back-up)
- : Customization: steel box color or changed of depth


vingcard
ASSA ABLOY

Experience a safer
and more open world

SPECIFICATIONS



ANTI-TAMPER LABYRINTHS PROTECT OUR SAFES' ELECTRONICS FROM MANIPULATION.



ELSAFE'S REVOLUTIONARY LOCKING SYSTEM RESISTS FORCIBLE ENTRY.



ONE-PIECE COLD-PRESSED DOOR IS OVER 70% STRONGER THAN FLAT STEEL DOOR.



EXTENDED SOLID STEEL BOLT HINGES ARE SECURE AND ULTRA-RELIABLE.


Elsafe Service Tools

A service tablet or a laptop is used with an interface cable and a unique service code. The service tool is also utilizing a software called Safelink for Windows for synchronizing programming between the service tools and safes. For instance, to securely override, uploading programs, change settings or transfer data to the electronic safes.



Power Outlets

Optional internal power outlet in different types (EU, UK, US or Universal with USB).

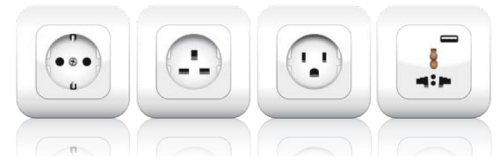

PinKey

PinKey is a compact electronic PIN code protected key to securely override and service Elsafe safes. This service tool must be combined with a USB docking cable and the Admin software to commission, service open a safe and print out events.



Measurements		Sentinel II 25	Sentinel II 41	Sentinel II 49
Outside H/W/D	mm	206/437/260	206/437/421	206/437/502
	in	8 ¹⁰ / ₁₆ /17 ³¹ / ₁₆ /10 ³¹ / ₁₆	8 ¹⁰ / ₁₆ /17 ³¹ / ₁₆ /16 ⁵⁸ / ₁₆	8 ¹⁰ / ₁₆ /17 ³¹ / ₁₆ /19 ¹³ / ₁₆
Inside H/W/D	mm	202/433/168	202/433/330	202/433/411
	in	7 ¹⁵ / ₁₆ /17 ¹¹ / ₁₆ /6 ⁹ / ₁₆	7 ¹⁵ / ₁₆ /17 ¹¹ / ₁₆ /13	7 ¹⁵ / ₁₆ /17 ¹¹ / ₁₆ /16 ³¹ / ₁₆
Door dimensions	mm	148/320	148/320	148/320
	in	5 ¹³ / ₁₆ /12 ⁵ / ₈	5 ¹³ / ₁₆ /12 ⁵ / ₈	5 ¹³ / ₁₆ /12 ⁵ / ₈
Internal volume	litres	14,1	27,7	34,5
	cu ft	0,50	0,98	1,22
Weight	kg	11,6	15,1	17,4
	lb	23,8	33,3	38,4

H/W/D: Height/Width/Depth

Color	Standard
Body color	Black Gray RAL 7021
Frame color	Silver
Front	Silver

Steel Thickness	
Door	2,5 mm
Body	2 mm
Back-wall	2,5 mm

Mounting options	
Back-wall	3 holes
Bottom	4 holes



*EPD Certification does not apply to the models Sentinel II 25 & Sentinel II 41

PACIFIC SECURITY SYSTEMS

Tel no: +63 2 8527 7171
 Mobile Hotline: +63 918 827 7171
 Email Add: sales@vingcardph.com

WWW.PSS.COM.PH



vingcard.com

Doc. Printed: 02/2024 | Copyright ASSA ABLOY ©

Specifications may change without notice | Note: Image colors in this brochure may differ from actual colors